

## Easy Space Square

Design iGuzzini

iGuzzini

Last information update: April 2025

### Product configuration: RI59.D8

RI59.D8: Square 225 - General Lighting - DALI - Neutral White - Low Output - White / transparent



### Product code

RI59.D8: Square 225 - General Lighting - DALI - Neutral White - Low Output - White / transparent

### Technical description

Square recess luminaire with fixed optics, in version with outer frame. High efficiency LED source with high colour rendering index - standard flow version to achieve an excellent correlation of light efficiency in general lighting uses. Emission unit made up of a transparent PMMA prismatic reflector in combination with the flow recovery unit and diffuser screen, both produced in PMMA, integrated into the external polycarbonate structure. The painted die-cast aluminium diffuser encompasses the steel wire coupling springs. A DALI dimmer power supply unit connected to the luminaire.

### Installation

recessed with steel wire springs for false ceilings from 1 to 25 mm thick

### Colour

White Transparent (D8)

### Weight (Kg)

1.18

### Mounting

ceiling surface

### Wiring

DALI dimmer functioning components included - power supply connection on the terminals with rapid connection of the driver.

### Notes

TPa version available on request, contact iGuzzini for more info

Complies with EN60598-1 and pertinent regulations



IP20

IP54

On the visible part of the product once installed



### Technical data

Im system:	3145	Colour temperature [K]:	4000
W system:	25.3	MacAdam Step:	2
Im source:	3310	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	22	Lamp code:	LED
Luminous efficiency (Im/W, real value):	124.3	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	95	Control:	DALI-2
CRI (minimum):	90		


### Polar

Imax=2028 cd				C0-180		CIE		Lux																									
90°				180°		90°		nL 0.95		70-96-99-100-95		UGR 20.3-20.2		DIN A.51		UTE 0.95C+0.00T		F*1=701		F*1+F*2=960		F*1+F*2+F*3=991		h		d1		d2		Em		Emax	
2000																								2		3.1		3.1		348		507	
																								4		6.3		6.3		87		127	
																								6		9.4		9.4		39		56	
																								8		12.5		12.5		22		32	
α=76°																																	

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	65	59	55	64	59	58	53	56
1.0	78	71	66	63	70	66	65	60	63
1.5	87	81	77	74	80	76	75	71	75
2.0	91	87	84	81	85	83	81	77	82
2.5	94	90	88	85	89	86	85	81	86
3.0	95	93	90	88	91	89	87	84	88
4.0	97	95	93	91	93	92	90	87	91
5.0	98	96	95	93	94	93	91	88	93

# Luminance curve limit

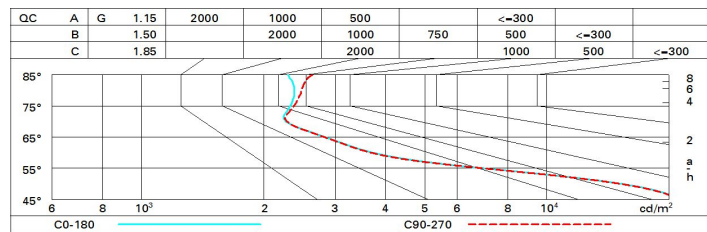

# UGR diagram

Corrected UGR values (at 3310 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	20.2	21.1	20.5	21.3	21.0	20.1	21.1	20.4	21.3	21.0
	3H	20.1	21.0	20.5	21.2	21.5	20.3	21.1	20.6	21.4	21.7
	4H	20.1	20.9	20.5	21.2	21.5	20.2	21.0	20.6	21.3	21.6
	6H	20.1	20.8	20.5	21.1	21.5	20.2	20.9	20.5	21.2	21.5
	8H	20.1	20.8	20.5	21.1	21.5	20.1	20.8	20.5	21.1	21.5
	12H	20.1	20.7	20.5	21.1	21.5	20.1	20.7	20.5	21.1	21.4
4H	2H	20.3	21.0	20.6	21.3	21.0	20.1	20.9	20.5	21.2	21.5
	3H	20.3	20.9	20.6	21.2	21.0	20.3	20.9	20.7	21.3	21.6
	4H	20.3	20.8	20.7	21.2	21.0	20.3	20.8	20.7	21.2	21.6
	6H	20.3	20.8	20.8	21.2	21.0	20.2	20.7	20.6	21.1	21.5
	8H	20.3	20.8	20.8	21.2	21.0	20.2	20.6	20.6	21.1	21.5
	12H	20.3	20.8	20.8	21.2	21.0	20.2	20.6	20.6	21.0	21.5
8H	4H	20.2	20.7	20.7	21.1	21.5	20.3	20.8	20.8	21.2	21.6
	6H	20.3	20.7	20.8	21.1	21.0	20.3	20.7	20.8	21.2	21.6
	8H	20.4	20.7	20.8	21.1	21.0	20.3	20.7	20.8	21.1	21.6
	12H	20.4	20.7	20.9	21.2	21.7	20.3	20.6	20.8	21.1	21.6
12H	4H	20.2	20.6	20.6	21.0	21.5	20.3	20.8	20.8	21.2	21.6
	6H	20.3	20.6	20.8	21.1	21.0	20.4	20.7	20.9	21.2	21.7
	8H	20.3	20.6	20.9	21.1	21.0	20.4	20.7	20.9	21.2	21.7
Variations with the observer position at spacing:											
S =		1.0H					1.0 / -2.2				
		1.5H					2.1 / -4.9				
		2.0H					3.7 / -5.4				