

Last information update: May 2025

**Product configuration: S107**

S107: Spotlight with bracket (to be ordered separately) - Neutral White LED - CRI 80 - Remote power supply - ST1 optic - Class I

**Product code**

S107: Spotlight with bracket (to be ordered separately) - Neutral White LED - CRI 80 - Remote power supply - ST1 optic - Class I

**Attention! Code no longer in production****Technical description**

Spotlight designed to use LED lamps and an ST1 optic. Consists of a die-cast aluminium optical assembly, steel brackets (both a bracket for the spotlight and a bracket for handle/pole application) and a clear, tempered sodium-calcium safety glass cover. It is fitted with an A2 stainless steel cable gland and a 2x1mm2 section 05RN-F cable. The optical assembly can be adjusted on a horizontal plane at an angle between  $-50^\circ$  /  $+90^\circ$ . Agorà is fitted with a graduated scale and mechanical locking device for positioning. The street optics system comes complete with a Neutral White monochrome LED circuit. The DALI electronic power supply is remote and can be ordered separately to allow the spotlights to be connected in series. Compatible with programming systems via DALI terminals or an NFC system. The spotlight is fitted with a protection system that in the event of a fault allows all the other products in the same circuit to operate normally. Constant current IP67 class I power supply units must be used (all the information is in the instruction sheet). All external screws used are made of A2 stainless steel.

**Installation**

Floor, ceiling, wall or pole-mounted installation.

**Colour**

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

**Weight (Kg)**

3.6

**Mounting**

wall surface|ceiling surface|free standing

**Wiring**

Double PG.

Complies with EN60598-1 and pertinent regulations




IK08




IP66

**Technical data**

lm system:	4220	Colour temperature [K]:	4000
W system:	33.4	MacAdam Step:	3
lm source:	-	Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)
W source:	-	Lamp code:	LED
Luminous efficiency (lm/W, real value):	126.3	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of $90^\circ$ [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	100	Intervallo temperatura ambiente:	from $-30^\circ\text{C}$ to $35^\circ\text{C}$ .
CRI (minimum):	80	Control:	DALI-2

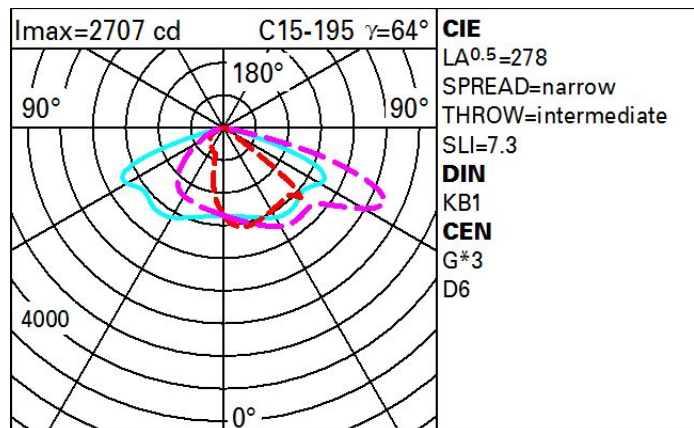**Polar**

# Isolux

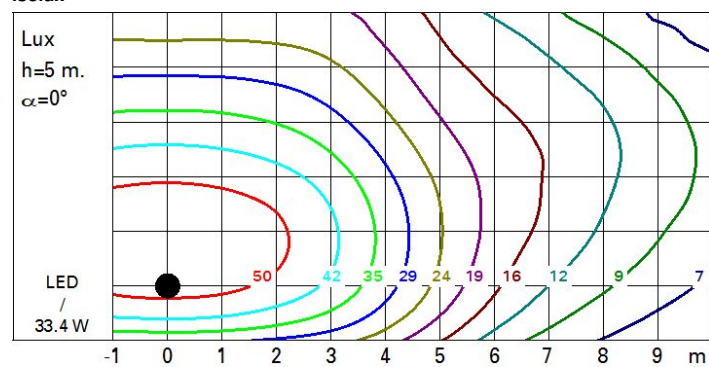

# Utilisation factors

