


Last information update: October 2023

Product configuration: P328

P328: Adjustable (tilting) round recessed luminaire - LED - flood



Product code

P328: Adjustable (tilting) round recessed luminaire - LED - flood

Technical description

Round recessed luminaire with contact frame. Adjustable version that tilts by a maximum of 30°. The main swivel body is made of die-cast aluminium with a radiant surface that guarantees optimum heat dissipation. Metallised, thermoplastic, high definition reflector - flood optic. Structure with die-cast aluminium external contact frame with a single white finish. Steel rotating parts. The ring inside the swivel body is made of thermoplastic available in a range of painted and metallised finishes. Safety glass included Quick and easy tool free assembly. High color rendering index 3,000K LED. Power unit available with a separate code no.

Installation

Recessed in a false ceiling by means of an anti-fall steel wire spring - minimum thickness of false ceiling: 1 mm - preparation hole Ø 59 mm.

Colour

White (01) | Black / Black (43) | Black / White (47) | White/Gold (41)* | White / Chrome (E4)* | White / burnished chrome (E7)* | White / gold satin-finish (E9)*

Weight (Kg)

0.13

* Colours on request

Mounting

wall recessed|ceiling recessed

Wiring

Direct current ballasts are available with a separate code no.: ON-OFF / 1-10V dimmable / DALI dimmable / Trailing Edge dimmable - the recessed fitting includes a cable and a quick-coupling connector to connect it to the connector on the ballast.

Notes

To reduce the glare caused by the internal wall of the recess when the luminaire has been rotated, a black, snap on accessory ring is available. A wide range of decorative accessories and diffusers is also available.

Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	648	Colour temperature [K]:	3000
W system:	6.8	MacAdam Step:	2
Im source:	800	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	6.8	Ballast losses [W]:	0
Luminous efficiency (Im/W, real value):	95.3	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	81	Number of optical assemblies:	1
Beam angle [°]:	40°	LED current [mA]:	200
CRI (minimum):	90		


Polar

	Imax=1579 cd	CIE nL 0.81 98-100-100-100-81 UGR 10.3-10.3 DIN A.61 UTE 0.81A+0.00T F*1=984 F*1+F*2=998 F*1+F*2+F*3=1000 CIBSE LG3 L<3000 cd/m² at 65° UGR<16 L<3000 cd/mq @65°	Lux				
				h	d	Em	E _{max}
				1	0.7	1222	1579
				2	1.5	305	395
				3	2.2	136	175
α=40°		4	2.9	76	99		

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	73	69	66	64	68	66	65	63	77
1.0	76	72	70	68	72	69	69	66	82
1.5	80	77	75	73	76	74	74	71	88
2.0	82	80	79	78	79	78	77	75	92
2.5	84	82	81	80	81	80	79	77	95
3.0	85	84	83	82	83	82	81	79	97
4.0	86	85	85	84	84	83	82	80	99
5.0	86	86	85	85	85	84	83	81	100

Luminance curve limit

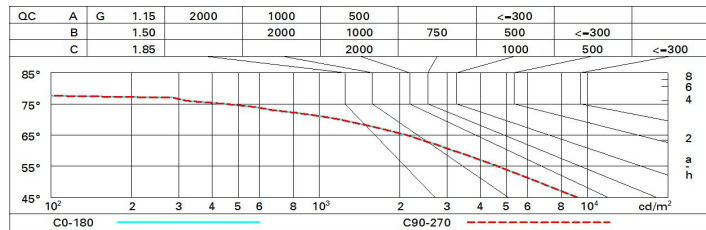

UGR diagram

Corrected UGR values (at 800 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceil/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	10.7	11.3	11.0	11.5	11.7	10.7	11.3	11.0	11.5	11.7
	3H	10.7	11.2	11.0	11.4	11.7	10.7	11.2	11.0	11.4	11.7
	4H	10.6	11.1	10.9	11.4	11.7	10.6	11.1	10.9	11.4	11.7
	6H	10.5	10.9	10.9	11.3	11.6	10.5	11.0	10.9	11.3	11.6
	8H	10.5	10.9	10.8	11.2	11.6	10.5	10.9	10.9	11.2	11.6
	12H	10.4	10.8	10.8	11.2	11.5	10.5	10.9	10.8	11.2	11.5
4H	2H	10.6	11.1	10.9	11.4	11.7	10.6	11.1	10.9	11.4	11.7
	3H	10.5	10.9	10.9	11.3	11.6	10.5	10.9	10.9	11.3	11.6
	4H	10.5	10.8	10.9	11.2	11.6	10.5	10.8	10.9	11.2	11.6
	6H	10.4	10.7	10.8	11.1	11.5	10.4	10.7	10.8	11.1	11.5
	8H	10.3	10.6	10.8	11.0	11.5	10.3	10.6	10.8	11.0	11.5
	12H	10.3	10.5	10.7	11.0	11.4	10.3	10.5	10.7	11.0	11.4
8H	4H	10.3	10.6	10.8	11.0	11.5	10.3	10.6	10.8	11.0	11.5
	6H	10.2	10.5	10.7	10.9	11.4	10.2	10.5	10.7	10.9	11.4
	8H	10.2	10.4	10.7	10.9	11.3	10.2	10.4	10.7	10.9	11.3
	12H	10.1	10.3	10.6	10.8	11.3	10.1	10.3	10.6	10.8	11.3
12H	4H	10.3	10.5	10.7	11.0	11.4	10.3	10.5	10.7	11.0	11.4
	6H	10.2	10.4	10.7	10.9	11.3	10.2	10.4	10.7	10.9	11.3
	8H	10.1	10.3	10.6	10.8	11.3	10.1	10.3	10.6	10.8	11.3
Variations with the observer position at spacing:											
S =	1.0H	5.0 / -5.1					5.0 / -5.1				
	1.5H	7.7 / -7.5					7.7 / -7.5				
	2.0H	9.7 / -9.9					9.7 / -9.9				