




Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	79	77	76	78	77	76	73	89
2.0	84	83	81	80	81	80	79	77	93
2.5	86	85	84	83	83	82	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	87	87	86	85	83	100

Luminance curve limit

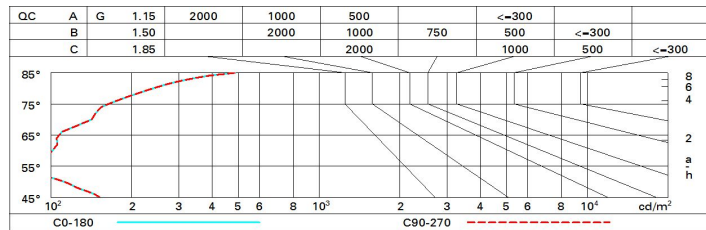

UGR diagram

Corrected UGR values (at 400 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	-2.7	-2.2	-2.4	-1.9	-1.7	-2.7	-2.2	-2.4	-1.9	-1.7
	3H	-2.8	-2.3	-2.5	-2.0	-1.8	-2.8	-2.3	-2.5	-2.1	-1.8
	4H	-2.8	-2.3	-2.5	-2.1	-1.8	-2.9	-2.4	-2.5	-2.2	-1.9
	6H	-2.8	-2.3	-2.4	-2.0	-1.7	-2.9	-2.5	-2.6	-2.2	-1.9
	8H	-2.7	-2.3	-2.3	-2.0	-1.7	-3.0	-2.6	-2.6	-2.3	-1.9
	12H	-2.6	-2.2	-2.2	-1.9	-1.5	-3.0	-2.6	-2.6	-2.3	-2.0
4H	2H	-2.9	-2.4	-2.5	-2.2	-1.9	-2.8	-2.3	-2.5	-2.1	-1.8
	3H	-2.9	-2.6	-2.6	-2.2	-1.9	-2.9	-2.5	-2.5	-2.2	-1.8
	4H	-2.9	-2.6	-2.5	-2.2	-1.9	-2.9	-2.6	-2.5	-2.2	-1.9
	6H	-2.8	-2.5	-2.4	-2.1	-1.7	-3.0	-2.7	-2.6	-2.3	-1.9
	8H	-2.7	-2.5	-2.3	-2.0	-1.6	-3.0	-2.7	-2.6	-2.3	-1.9
	12H	-2.5	-2.3	-2.1	-1.8	-1.4	-3.0	-2.8	-2.6	-2.4	-1.9
8H	4H	-3.0	-2.7	-2.6	-2.3	-1.9	-2.7	-2.5	-2.3	-2.0	-1.6
	6H	-2.8	-2.6	-2.3	-2.2	-1.7	-2.7	-2.4	-2.2	-2.0	-1.5
	8H	-2.6	-2.4	-2.1	-2.0	-1.5	-2.6	-2.4	-2.1	-2.0	-1.5
	12H	-2.3	-2.1	-1.8	-1.6	-1.1	-2.6	-2.4	-2.1	-1.9	-1.4
12H	4H	-3.0	-2.8	-2.6	-2.4	-1.9	-2.5	-2.3	-2.1	-1.8	-1.4
	6H	-2.8	-2.6	-2.3	-2.2	-1.7	-2.4	-2.2	-1.9	-1.7	-1.2
	8H	-2.6	-2.4	-2.1	-1.9	-1.4	-2.3	-2.1	-1.8	-1.6	-1.1
Variations with the observer position at spacing:											
S =	1.0H	5.6 / -3.8					5.6 / -3.8				
	1.5H	8.3 / -4.0					8.3 / -4.0				
	2.0H	10.3 / -4.1					10.3 / -4.1				