Light Up

Design iGuzzini **iGuzzini**

Last information update: October 2024

Product configuration: ER22+X488.04
ER22: Recessed luminaire Earth D=239 mm - Flush-mount stainless steel frame -Warm White - Medium optic - DALI
X488.04: Outer casing in plastic for the ground, floor with stainless steel ring + closure cap - Black

Product code
ER22: Recessed luminaire Earth D=239 mm - Flush-mount stainless steel frame -Warm White - Medium optic - DALI

Technical description
Recessed luminaire applicable to the floor or ground, designed for fitting monochrome white LED sources, for illumination, fixed optic, with DALI dimmable incorporated electronic control gear. The round frame has a diameter D=239 mm; the body and frame are made of AISI 304 stainless steel with sodium-calcium extra clear glass, thickness 15 mm. Stainless steel body coated with black paint. The luminaire is fixed to the outer casing by means of two TORX-type screws that ensure proper anchoring. Inclusive of LED circuit, OPTI BEAM aluminium reflector and black plastic cover. The product is wired using an A2 stainless steel cable gland, with type A07RNF 4x1 mm² outgoing power cord having L=1191 mm. The cable is equipped with an anti-transpiration device (IP68) consisting of a silicone seal placed on the power cable and housed inside the product. The outer casing for installation can be ordered separately from the plastic optical assembly. The assembly made up of the frame, optical assembly and outer casing guarantees 5000 kg resistance to static loads. Maximum glass surface temperature is lower than 40°C.

Installation
The product is secured to the outer casing by means of two TORX-type screws. The luminaire can be installed recessed, floor-standing, using an outer casing.



Colour	Weight (Kg)
Steel (13)	5

Mounting
Floor recessed|ground recessed

Wiring
Product inclusive of 220-240 VAC DALI dimmable electronic control gear.

Notes
IP68 degree of protection on the product and cable when using IP68 connectors * The product is not suitable for installation in swimming pools and fountains. Overvoltage protection: 4KV Common mode, 3,5KV differenzial mode

Complies with EN60598-1 and pertinent regulations

IK10 5000 kg IP66 10m IP68 Complete immersion for limited periods, not suitable for use in swimming pools or fountains.

The lighting fixtures were designed and tested to withstand a static load of up to 50000 N and to resist drive-over stress by vehicles with tires. The fixtures cannot be used in lanes subjected to horizontal stresses due to acceleration, braking and / or changes of direction.

Accessory code
X488.04: Outer casing in plastic for the ground, floor with stainless steel ring + closure cap - Black

Technical description
Made of plastic (polypropylene). Inclusive of front cap with system for extracting the cables and double cable entry.

Installation
Floor-standing (concrete)

Colour	Weight (Kg)
Steel (13)	2

Mounting
ground surface|Floor recessed|ground recessed

Complies with EN60598-1 and pertinent regulations

Technical data

lm system:	2379
W system:	21
lm source:	3050
W source:	18
Luminous efficiency (lm/W, real value):	113.3
lm in emergency mode:	-
Total light flux at or above an angle of 90° [Lm]:	2379
Light Output Ratio (L.O.R.) [%]:	78
Beam angle [°]:	18°
CRI (minimum):	80
Colour temperature [K]:	3000
MacAdam Step:	2

Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)
Life Time LED 2:	100,000h - L90 - B10 (Ta 40°C)
Lamp code:	LED
Number of lamps for optical assembly:	1
ZVEI Code:	LED
Number of optical assemblies:	1
Intervallo temperatura ambiente:	from -25°C to 50°C.
Power factor:	See installation instructions
Inrush current:	10 A / 200 µs
Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 18 luminaires B16A: 30 luminaires C10A: 31 luminaires C16A: 51 luminaires
Overvoltage protection:	5kV Common mode & 4kV Differential mode
Control:	DALI-2

Polar

Imax=14795 cd

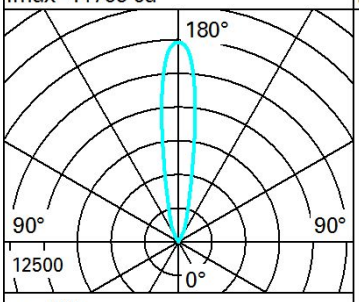

α = 18°

Lux

h	d	Em	Emax
8	2.5	187	231
16	5.1	47	58
24	7.6	21	26
32	10.1	12	14